

● **Descrizione / Description**

Scheda LED RGB FULL COLOR a tensione costante; 7,2W; 570 x 8 mm; PCB FR4. Divisibile in singole schede da 3 LED.

Constant voltage RGB FULL COLOR LED board; 7,2W; 570 x 8 mm; PCB FR4. Divisible into single LED boards of 3 LED.

● **Temperatura e dissipazione / Temperature and dissipation**

Tmax: +65°C, da verificare sull'applicazione finale misurata nel punto più vicino al LED.
ta: -20°C ~ +40°C.

Auto-dissipata in aria con ta<40°C. Al fine di una corretta dissipazione, la scheda deve essere fissata su una struttura in alluminio.

Tmax: +65°C, to be tested on the final application measured at the nearest point to the LED.

ta: -20°C ~ +40°C.

Self-dissipated with ta<40°C. In order to obtain right dissipation, the LED board must be fixed to an aluminium support.

● **CCT & Ra**

Temperatura colore singolo LED / Single LED colour temperature:

R 620~630 nm


G 520~530 nm

B 460~470 nm



Max Power 7,2W

A

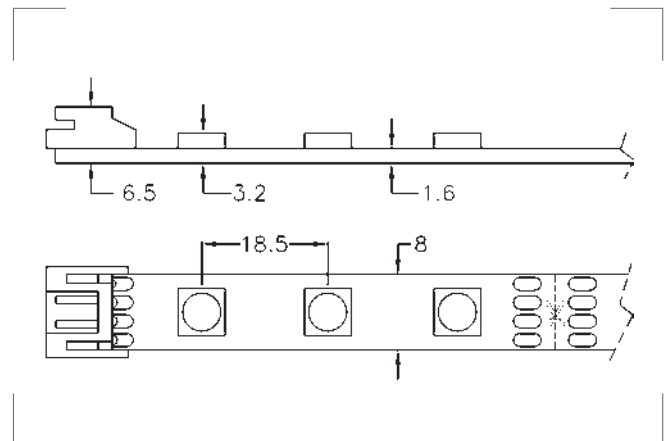

**Accessori
Accessories**

Connettore con cavo
Connector with cable



Supporto
Support



Codice Code	Colore del LED LED color	Tensione di alimentazione Input voltage	Potenza massima Max power (W)	Flusso luminoso massimo Max light flux (lm)
STR0305050F...	R	12Vdc	7,2	27
	G		7,2	74
	B		7,2	20
	R G B		7,2	121