


Max Power 7,2W

A

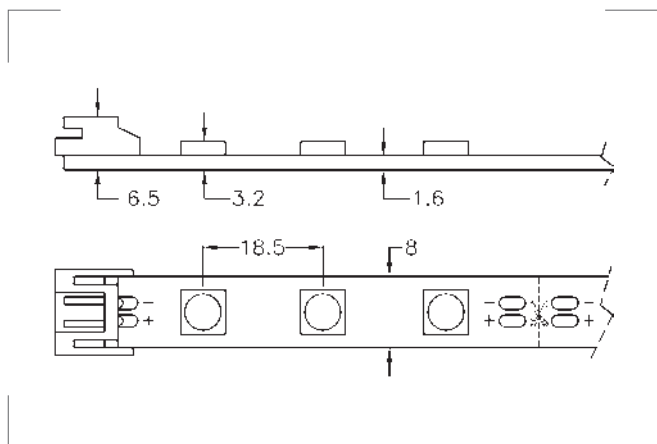

## ● Descrizione / Description

Scheda LED a tensione costante; 7,2W; 570 x 8 mm; PCB FR4.  
Divisibile in singole schede da 3 LED.

*Constant voltage LED board; 7,2W; 570 x 8 mm; PCB FR4.  
Divisible into single LED boards of 3 LED.*

## ● Temperatura e dissipazione / Temperature and dissipation

T<sub>max</sub>: +65°C, da verificare sull'applicazione finale misurata nel punto più vicino al LED.  
t<sub>a</sub>: -20°C ~ +40°C.

Auto-dissipata in aria con t<sub>a</sub><40°C. Al fine di una corretta dissipazione, la scheda deve essere fissata su una struttura in alluminio.

*T<sub>max</sub>: +65°C, to be tested on the final application measured at the nearest point to the LED.*

*t<sub>a</sub>: -20°C ~ +40°C.*

*Self-dissipated with t<sub>a</sub><40°C. In order to obtain right dissipation, the LED board must be fixed to an aluminium support.*

## ● CCT & Ra

Temperatura colore singolo LED / Single LED colour temperature:

**R** 620~630 nm



Codice Code	Colore del LED LED color	Tensione di alimentazione Input voltage	Potenza massima Max power (W)	Flusso luminoso massimo Max light flux (lm)
STR0305050R	<b>R</b>	12Vdc	7,2	60

### Accessori Accessories

Connettore con cavo  
Connector with cable



Supporto  
Support

