
# MPM

CONNECTION BOXE

# **CRET 3 POLES**

DRAWER CONNECTOR IP65 FOR WATERTIGHT LIGHTINGS PATENTED PRODUCT - CERTIFIED BY VDE AND LCIE

CRET 3 POLES ( CONNECTOR BODY ) CRET T3P P00009 904800 Packing unit 300

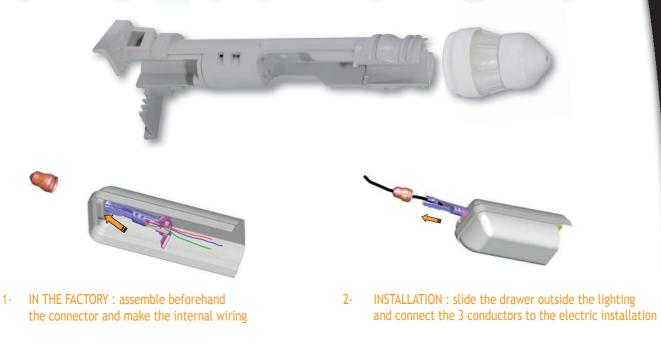



3- Insert the drawer connector inside the lighting



4- Screw the watertight nut

## PURPOSE

- It allows to connect watertight lightings respecting IP65 degree of protection
- It fits to a 3 x 1.5 mm<sup>2</sup> or a 3 x 2.5 mm<sup>2</sup> rigid round cable double insulation from the electric installation

## **FEATURES**

- Made of injection moulded insulating thermoplastic that meets the incandescent wire test requirements
- Suitable for continuous use at 105°C
- IP65 degree of protection
- It can be fixed up in a Ø 21 mm hole
- It consists of a drawer connector with a screw nut supplied with 2 seals and a quick connection terminal.
- The CRET allows you to connect a watertight lighting without pulling it apart
- Colour: light-grey
- Assembly with a watertight screw nut

Moulages Plastiques du Midi - Etienne Lacroix GROUP - 10, boulevard de Joffrery - CS 70208 - 31605 MURET CEDEX - FRANCE Phone: +33(0) 561 566 650 - Fax: +33(0) 561 566 651 - E-mail: mpm@mpm.fr - www.mpm.fr

This document is not contractual. It is the sole property of Moulages Plastiques du Midi, which reserves the right to update and reproduce this document at any time. Copyright / Realisation : Etienne Lacroix tous artifices SA - 12/2017

# MPM

## **CRET 5 POLES**

#### DRAWER CONNECTOR IP65 FOR WATERTIGHT LIGHTINGS PATENTED PRODUCT - CERTIFIED BY VDE AND LCIE

CRET 5 POLES ( CONNECTOR BODY ) CRET T5P P00009 904900 Packing unit 300





External wiring (installation)



Watertight screw nut

## PURPOSE

- It allows to connect watertight lightings to the main respecting IP65 degree of protection
- It fits to a 5 x 1.5 mm<sup>2</sup> or a 5 x 2.5 mm<sup>2</sup> rigid round cable double insulation from the electric installation

### **FEATURES**

- Made of injection moulded insulating thermoplastic that meets the incandescent wire test requirements
- Suitable for continuous use at 105°C
- IP65 degree of protection
- It can be fixed up in a Ø 21 mm hole
- It consists of a drawer connector with a screw nut supplied with 2 seals and quick connection terminal
- The CRET allows you to connect a watertight lighting without pulling it apart

Moulages Plastiques du Midi - Etienne Lacroix GROUP - 10, boulevard de Joffrery - CS 70208 - 31605 MURET CEDEX - FRANCE Phone: +33(0) 561 566 650 - Fax: +33(0) 561 566 651 - E-mail: mpm@mpm.fr - www.mpm.fr CONNECTION BOXE



# **CRET SCREW NUTS**

CRET SCREW NUT CRET SCREW NUT WITHOUT CABLE WAY CRET SCREW NUT + 2 LIPS SEAL CRET SCREW NUT + 2 LIPS SEAL WITHOUT CABLE WAY Packing unit 300 P00009 905000 P00009 905001 P00009 905002 P00009 905003







#### CRET ARE MADE OF A DRAWER CONNECTOR WITH A SCREW NUT 4 DIFFERENT SCREW NUTS ARE AVAILABLE ACCORDING TO YOUR NEEDS EACH MODEL CAN BE SCREWED ON BOTH 3 AND 5 POLES CRET DRAWER CONNECTOR





CONNECTION

Moulages Plastiques du Midi - Etienne Lacroix GROUP - 10, boulevard de Joffrery - CS 70208 - 31605 MURET CEDEX - FRANCE Phone: +33(0) 561 566 650 - Fax: +33(0) 561 566 651 - E-mail: mpm@mpm.fr - www.mpm.fr

This document is not contractual. It is the sole property of Moulages Plastiques du Midi, which reserves the right to update and reproduce this document at any time. Copyright / Realisation : Etienne Lacroix tous artifices SA - 12/2017